

Metal Frame LCD Monitor-

MA150

- 15.0" XGA TFT LCD with resolution up to 1024 x 768.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.



SPECIFICATIONS

| Model Name | Display Resolution (pixel) | Display Color | Viewing Angle (CR ≥ 10) (R/L/U/D) | Brightness (cd/m ²) | Contrast Ratio | Backlight Unit | Response Time (msec) |
|------------|----------------------------|---------------|-----------------------------------|---------------------------------|----------------|----------------|----------------------|
| MA150N1 | XGA(1024x768) | 16.2M | 70 / 70 / 50 / 60 | 250 | 700:1 | CCFL | 8 |
| MA150N2 | XGA(1024x768) | 262K / 16.2M | 80 / 80 / 70 / 60 | 350 | 700:1 | CCFL | 8 |
| MA150N3 | XGA(1024x768) | 262K / 16.2M | 80 / 80 / 60 / 80 | 400 | 700:1 | LED | 8 |
| MA150N4 | XGA(1024x768) | 16.7M | 75 / 75 / 60 / 50 | 250 | 450:1 | CCFL | 25 |
| MA150N5 | XGA(1024x768) | 262K / 16.2M | 85 / 85 / 80 / 80 | 300 | 700:1 | CCFL | 8 |
| MA150N6 | XGA(1024x768) | 262K / 16.2M | 70 / 70 / 65 / 60 | 550 | 700:1 | CCFL | 8 |

Note: Fanless: Brightness < 1000 cd/m² ;
 Add fan: Brightness ≥ 1000 cd/m²

ORDER INFORMATION


MA150XX - X X X X

① ② ③ ④ ⑤

| | | | |
|--------------------|---|----------------|---|
| ① Model Name | | ④ Signal Input | C: VGA. D: VGA + DVI-D. E: VGA + DVI-D + Audio. J: VGA + DVI-I + Audio + HDMI. L: VGA + S-Video + CVBS. |
| ② Mounting / Stand | N: No accessories. | | |
| ③ Touch Screen | N: No Touch screen or glass. G: Glass. R: Resistive, RS232 interface. U: Resistive, USB interface. | ⑤ Other | |

DIMENSIONS

Unit:mm

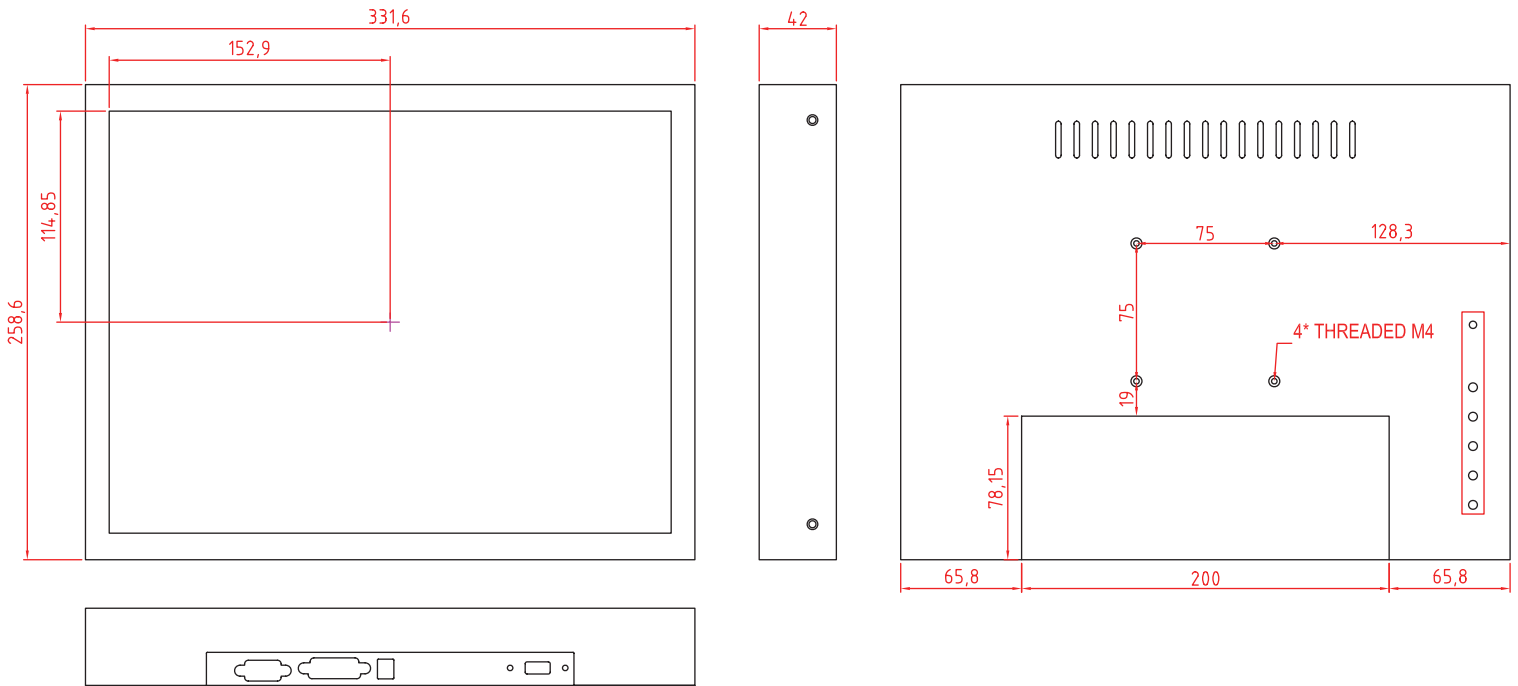

ACCESSORIES

| | | | |
|---------------|-----------------------------------|---------------|--------------------------|
| Power Cord | | VGA Cable | |
| R003OF180G003 | Power Cord US Type L=1.8m | R003OH180G004 | DB15p, Male/Male, L=1.8m |
| R003OF180G004 | Power Cord German Type /2P L=1.8m | R003OH300G001 | DB15p, Male/Male, L=3.0m |
| R003OF180G005 | Power Cord UK Type /3P L=1.8m | R003OH500G001 | DB15p, Male/Male, L=5.0m |
| Adapter | | | |
| R007W05002512 | DC Adapter 12V 50W 4.16A | | |