

Rack Mount LCD Monitor- 7U

RA150

- 15.0" XGA TFT LCD with resolution up to 1024 x 768.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.



SPECIFICATIONS

Model Name	Display Resolution (pixel)	Display Color	Viewing Angle (CR ≥ 10) (R/L/U/D)	Brightness (cd/m ²)	Contrast Ratio	Backlight Unit	Response Time (msec)
RA150N1	XGA(1024x768)	16.2M	70 / 70 / 50 / 60	250	700:1	CCFL	8
RA150N2	XGA(1024x768)	262K / 16.2M	80 / 80 / 70 / 60	350	700:1	CCFL	8
RA150N3	XGA(1024x768)	262K / 16.2M	80 / 80 / 60 / 80	400	700:1	LED	8
RA150N4	XGA(1024x768)	16.7M	75 / 75 / 60 / 50	250	450:1	CCFL	25
RA150N5	XGA(1024x768)	262K / 16.2M	85 / 85 / 80 / 80	300	700:1	CCFL	8
RA150N6	XGA(1024x768)	262K / 16.2M	70 / 70 / 65 / 60	550	700:1	CCFL	8

Note: Fanless: Brightness < 1000 cd/m² ;
Add fan: Brightness ≥ 1000 cd/m²

ORDER INFORMATION


RA150XX - X X X

① ② ③ ④

① Model Name		③ Signal Input	C: VGA only. D: VGA + DVI-D. E: VGA + DVI-D + Audio. J: VGA + DVI-I + Audio + HDMI. L: VGA + S-Video + CVBS.
② Touch Screen (Optional)	N: No touch screen or glass. G: Glass. R: RS-232, resistive. U: USB, resistive.	④ Color	B: Black W: White (RAL7035)

DIMENSIONS

Unit:mm

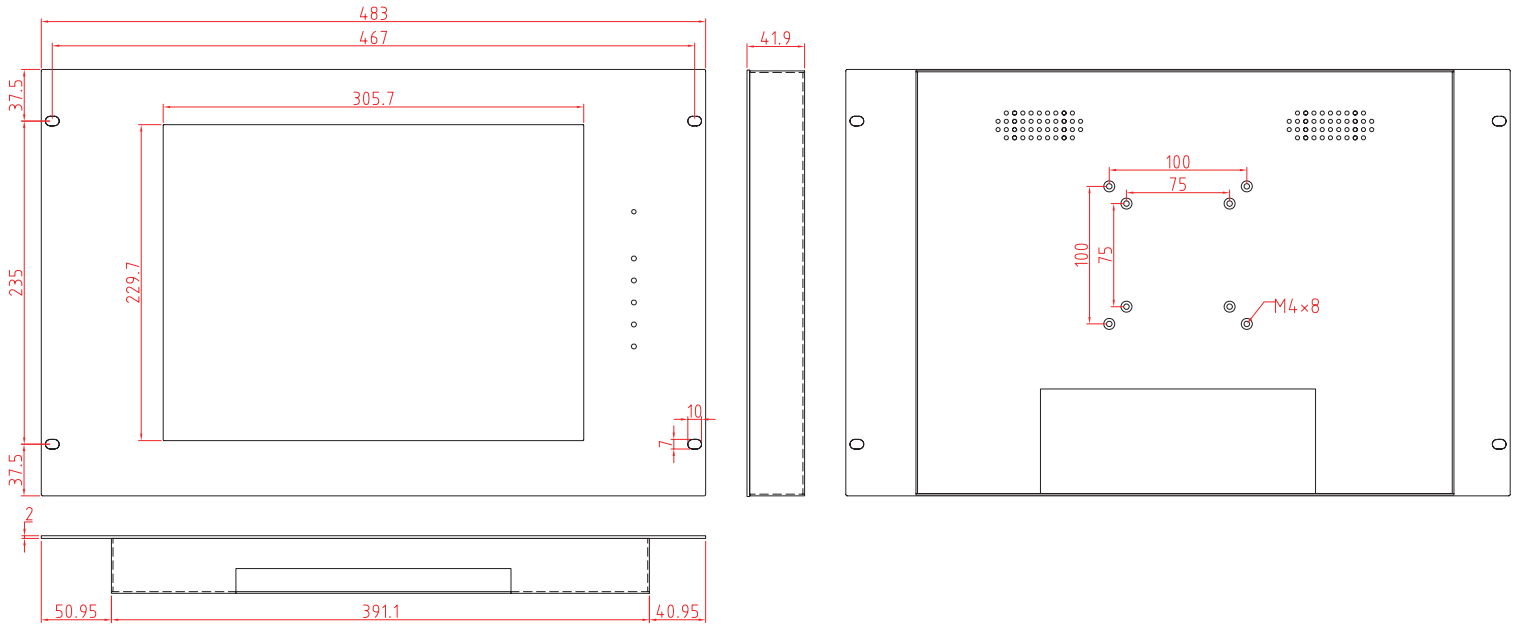

ACCESSORIES

Power Cord		VGA Cable	
R003OF180G003	Power Cord US Type L=1.8m	R003OH180G004	DB15p, Male/Male, L=1.8m
R003OF180G004	Power Cord German Type /2P L=1.8m	R003OH300G001	DB15p, Male/Male, L=3.0m
R003OF180G005	Power Cord UK Type /3P L=1.8m	R003OH500G001	DB15p, Male/Male, L=5.0m
Adapter			
R007W05002512	DC Adapter 12V 50W 4.16A		