Rack Mount LCD Monitor - 9U

RA190

- 19.0” SXGA TFT LCD with resolution up to 1280 x 1024.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marline, transportation, gaming, gas pump.

SPECIFICATIONS

Model Name	Display Resolution (pixel)	Display Color	Viewing Angle (CR≧10) (R/L/U/D)	Brightness (cd/m²)	Contrast Ratio	Backlight Unit	Response Time (msec)
RA190N1	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	450	1000:1	CCFL	5
RA190S1	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	1000	1000:1	LED	5
RA190N2	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	350	1000:1	LED	5
RA190N4	SXGA(1280x1024)	16.7M	89 / 89 / 89 / 89	600	2000:1	LED	20
RA190N6	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	250	1000:1	CCFL	5
RA190N7	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	250	1000:1	LED	5
RA190N8	SXGA(1280x1024)	16.7M	89 / 89 / 89 / 89	300	1300:1	CCFL	20
RA190N9	SXGA(1280x1024)	16.7M	89 / 89 / 89 / 89	300	2000:1	LED	20

Note: Fanless: Brightness < 1000 cd/m² ;
Add fan: Brightness ≧1000 cd/m²

ORDER INFORMATION

RA190XX - X X X
① ② ③ ④

①	Model Name	
②	Touch Screen (Optional)	N: No touch screen or glass.
		G: Glass.
		R: RS-232, resistive.
		U: USB, resistive.
③	Signal Input	C: VGA only.
		D: VGA + DVI-D.
		E: VGA + DVI-D + Audio.
		J: VGA + DVI-I + Audio + HDMI.
		L: VGA + S-Video + CVBS.
④	Color	B: Black
		W: Wihte (RAL7035)

DIMENSIONS

Unit:mm

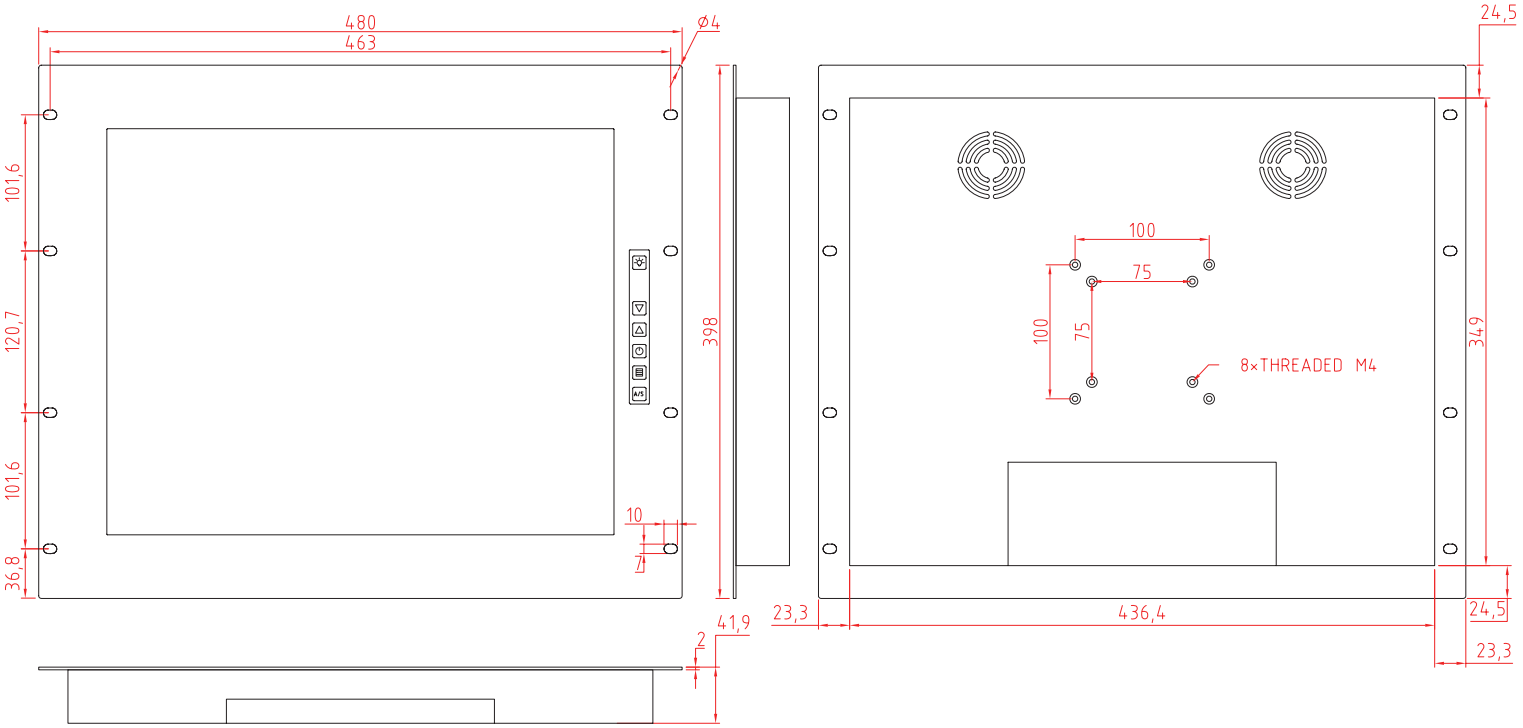

ACCESSORIES

Power Cord		VGA Cable	
R003OF180G003	Power Cord US Type L=1.8m	R003OH180G004	DB15p, Male/Male, L=1.8m
R003OF180G004	Power Cord German Type /2P L=1.8m	R003OH300G001	DB15p, Male/Male, L=3.0m
R003OF180G005	Power Cord UK Type /3P L=1.8m	R003OH500G001	DB15p, Male/Male, L=5.0m
Adapter			
R007W05002512	DC Adapter 12V 50W 4.16A		

Note: this is a simplified drawing and some components are not made in detail.
Please contact our sales representative if you need further product's information.

*All specifications and photos are subject to change without notice.