




Rack Mount LCD Monitor - 8U

# RB170

- 17.0" SXGA TFT LCD with resolution up to 1280 x 1024.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.



## SPECIFICATIONS

Model Name	Display Resolution (pixel)	Display Color	Viewing Angle (CR ≥ 10) (R/L/U/D)	Brightness (cd/m <sup>2</sup> )	Contrast Ratio	Backlight Unit	Response Time (msec)
RB170N1	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	380	1000:1	CCFL	5
 RB170S1	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	1000	1000:1	LED	5
RB170N2	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	350	1000:1	LED	5
RB170N3	SXGA(1280x1024)	16.7M	85 / 85 / 80 / 80	250	1000:1	CCFL	5

Note: Fanless: Brightness < 1000 cd/m<sup>2</sup> ;  
Add fan: Brightness ≥ 1000 cd/m<sup>2</sup>



## ORDER INFORMATION

**RB170XX - X X X X**  
①                      ②   ③   ④   ⑤

① Model Name		④ Signal Input	C: VGA only. D: VGA + DVI-D. E: VGA + DVI-D + Audio. J: VGA + DVI-I + Audio + HDMI. L: VGA + S-Video + CVBS.
② Accessories	N: No handles H: With handles	⑤ Color	B: Black W: White (RAL7035)
③ Touch Screen (Optional)	N: No touch screen or glass. G: Glass. R: Resistive, RS-232. U: Resistive, USB.		

## DIMENSIONS

Unit:mm

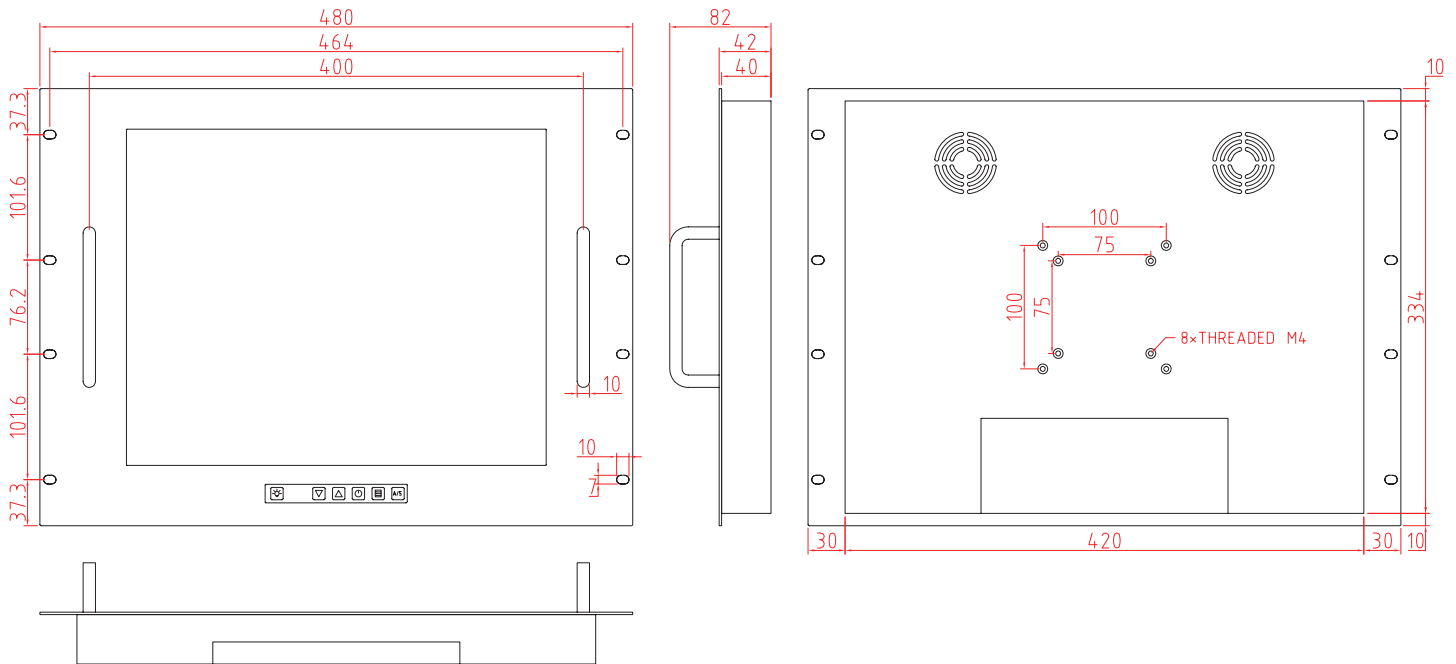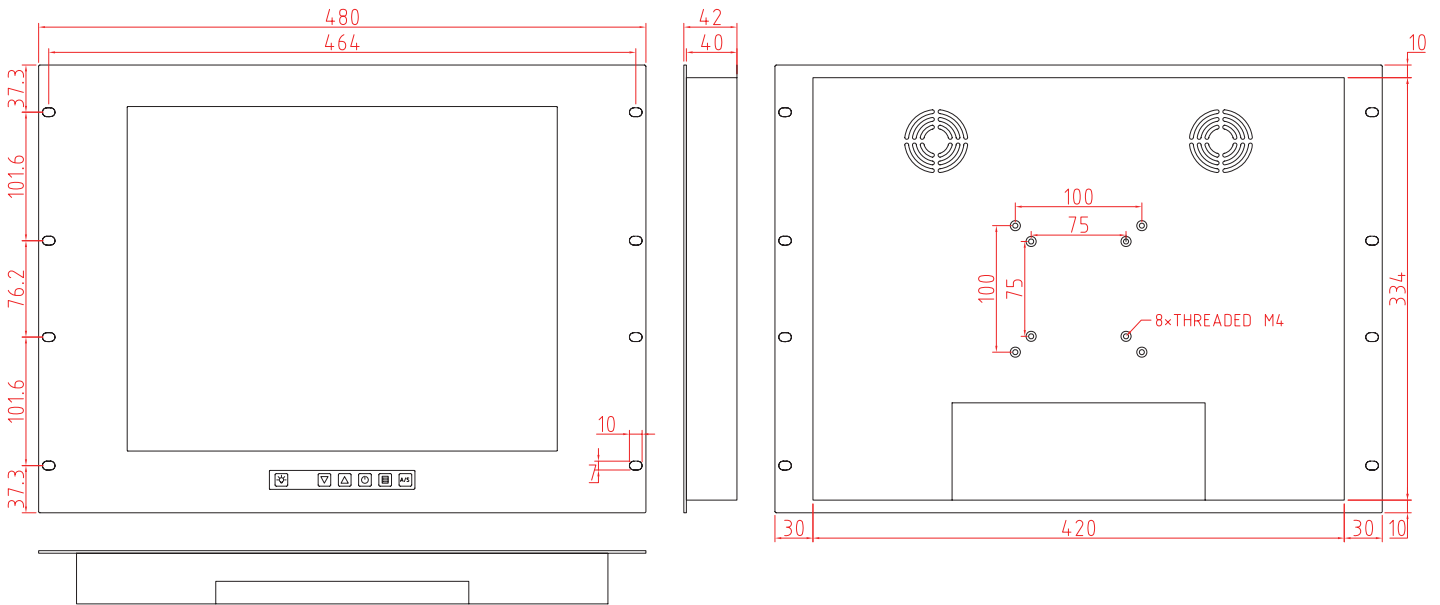

## ACCESSORIES

Power Cord		VGA Cable	
R003OF180G003	Power Cord US Type L=1.8m	R003OH180G004	DB15p, Male/Male, L=1.8m
R003OF180G004	Power Cord German Type /2P L=1.8m	R003OH300G001	DB15p, Male/Male, L=3.0m
R003OF180G005	Power Cord UK Type /3P L=1.8m	R003OH500G001	DB15p, Male/Male, L=5.0m
Adapter			
R007W05002512	DC Adapter 12V 50W 4.16A		