

Open Frame LCD Monitor

FA104

- 10.4" SVGA TFT LCD with resolution up to 800 x 600.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.



SPECIFICATIONS

Model Name	Display Resolution (pixel)	Display Color	Viewing Angle (CR ≥ 10) (R/L/U/D)	Brightness (cd/m ²)	Contrast Ratio	Backlight Unit	Response Time (msec)
FA104N1	SVGA(800x600)	262K / 16.2M	70 / 70 / 55 / 65	400	500:1	CCFL	30
FA104N2	SVGA(800x600)	262K / 16.2M	80 / 80 / 60 / 80	400	700:1	LED	30
FA104N3	SVGA(800x600)	262K / 16.2M	70 / 70 / 55 / 65	230	500:1	CCFL	30
FA104N5	SVGA(800x600)	262K	60 / 60 / 55 / 65	350	400:1	CCFL	40
FA104N6	SVGA(800x600)	262K / 16.2M	80 / 80 / 60 / 70	230	500:1	LED	35

Note: Fanless: Brightness < 1000 cd/m² ;

Add fan: Brightness ≥ 1000 cd/m²

ORDER INFORMATION


FA104XX - X X

① ② ③

① Model Name		③ Signal Input	C: VGA only. D: VGA + DVI-D. E: VGA + DVI-D + Audio. J: VGA + DVI-I + Audio + HDMI.
② Touch (Optional)	N: No touch screen or glass. G: Glass. R: RS-232, resistive. U: USB, resistive.		

DIMENSIONS

Unit:mm

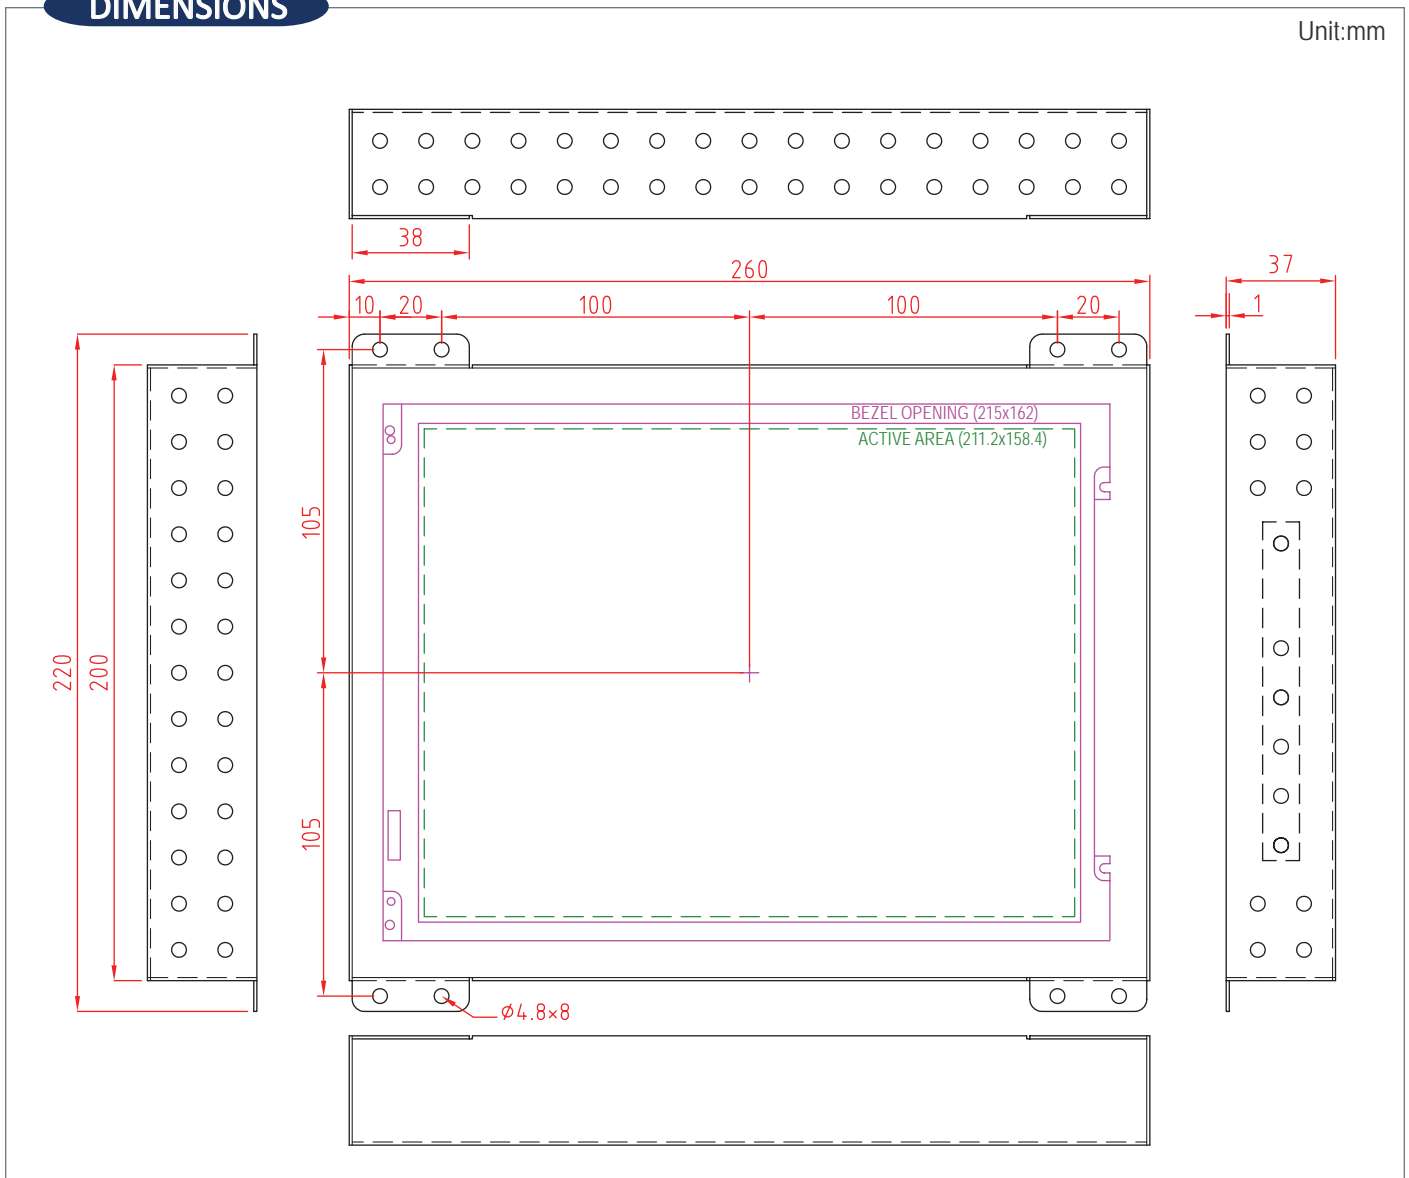

ACCESSORIES

Power Cord		VGA Cable	
R003OF180G003	Power Cord US Type L=1.8m	R003OH180G004	DB15p, Male/Male, L=1.8m
R003OF180G004	Power Cord German Type /2P L=1.8m	R003OH300G001	DB15p, Male/Male, L=3.0m
R003OF180G005	Power Cord UK Type /3P L=1.8m	R003OH500G001	DB15p, Male/Male, L=5.0m
Adapter			
R007W05002512	DC Adapter 12V 50W 4.16A		