

SG320240L (320 DOTS X 240 DOTS)

FEATURES

- ◆ NO BUILT-IN CONTROLLER
- ◆ 2.7~5.5V POWER SUPPLY
- ◆ 1/240 DUTY CYCLE
- ◆ 4-BIT PARALLEL INTERFACE

MECHANICAL DATA

ITEM	DIMENSIONS	UNIT
Module Size (W x H x T)	148.3 x 100.0 x 14.1	mm
Viewing Area (W x H)	107.2 x 78.4	mm
Active Area (W x H)	99.17 x 74.37	mm
Dot Size (W x H)	0.28 x 0.28	mm
Dot Pitch (W x H)	0.31 x 0.31	mm

INTERFACE PIN CONNECTIONS

NO.	SYMBOL	LEVEL	FUNCTION
1	DB0	H/L	Data Bit0
2	DB1	H/L	Data Bit1
3	DB2	H/L	Data Bit2
4	DB3	H/L	Data Bit3
5	FLM	H	Frame Signal
6	M	H/L	Control Signal For AC Driving
7	CL1	H→L	Common Driver Data Shift Signal
8	CL2	H→L	Clock Pulse For Segment Shift Register
9	/DISPOFF	L	Display OFF Active LOW
10	VSS	0V	Power Supply Ground
11	FG	-	For GND
12	VDD	5V	Power Supply Voltage
13	VEE	-	Power Supply Voltage For LCD
14	Vo	-	Contrast Adjustment Voltage


ABSOLUTE MAXIMUM RATINGS


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage For Logic	V _{DD} -V _{SS}	0	-	7	V
Supply Voltage For LCD Drive	V _{DD} -V _o	0	-	30	V
Input Voltage	V _i	V _{SS}	-	V _{DD}	V

ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Supply Voltage For Logic	V _{DD} -V _{SS}	-	2.7	5	5.5	V	
LCD Supply Voltage	V _{DD} -V _o	V _{DD} =5V Ta=25°C	22.4	23.5	24.3	V	
Supply Current	I _{DD}	V _{DD} =5V	-	16	25	mA	
Input Voltage	"HIGH" Level	V _{IH}	-	2.2	-	V _{DD}	V
	"LOW" Level	V _{IL}	-	-	-	0.6	V
Output Voltage	"HIGH" Level	V _{OH}	-	2.4	-	V	V
	"LOW" Level	V _{OL}	-	-	-	0.4	V

EXTERNAL DIMENSIONS

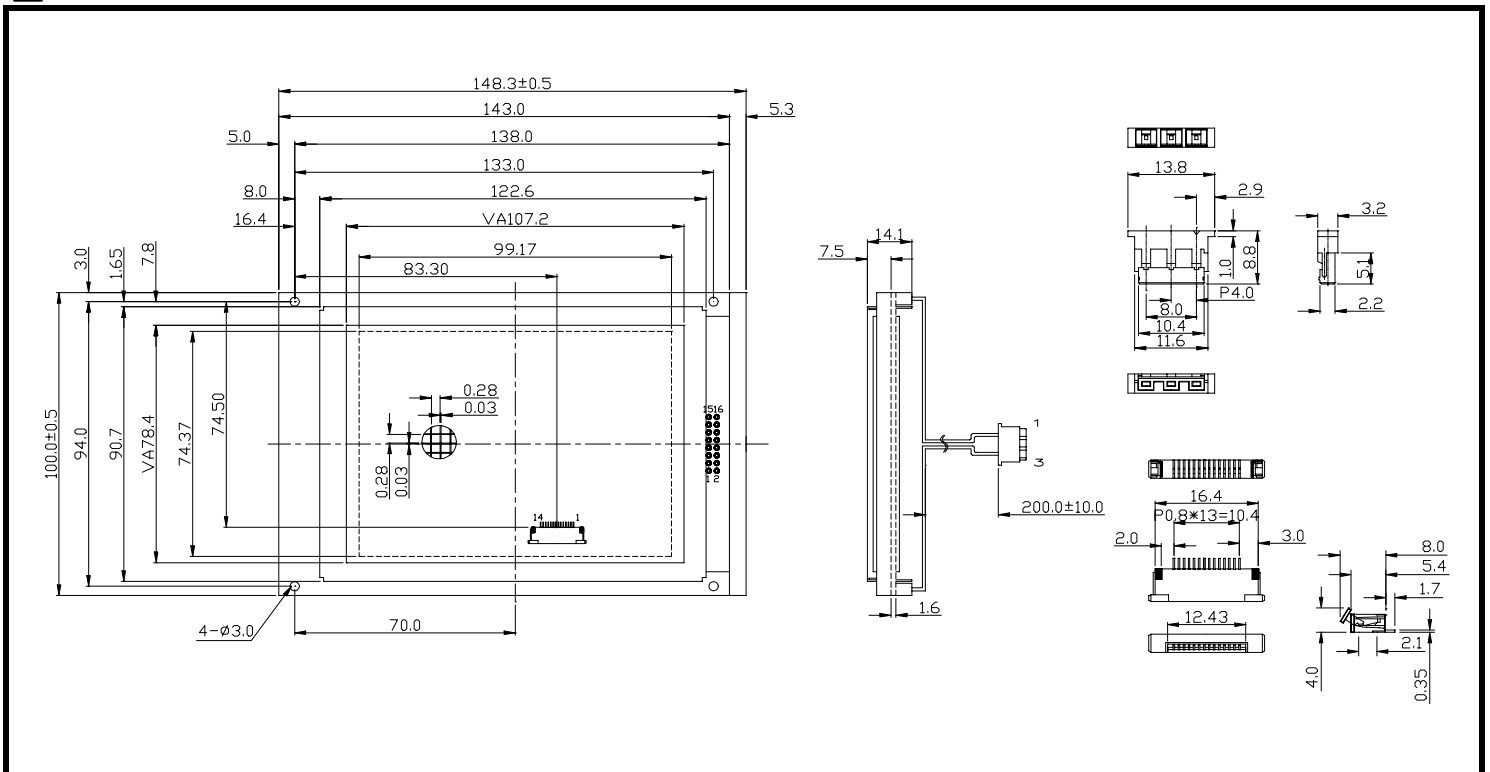




SG320240L (320 DOTS X 240 DOTS)

■ TIMING CHARACTERISTICS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT.
Frequency Of Maximum Clock	f_{CP}	-	-	8	MHZ
CL1, CL2, Pulse Width	t_w	45	-	-	ns
Rise, Fall Time	t_r, t_f	-	-	15	ns
Data Setup Time	t_{DSU}	20	-	-	ns
Data Hold Time	t_{DHD}	20	-	-	ns
CL1 Setup Time	t_{LSU}	80	-	-	ns
CL1→ CL2 Time	t_{LC}	80	-	-	ns
FLM Setup Time	t_{setup}	100	-	-	ns
FLM Hold Time	t_{hold}	100	-	-	ns
M Delay Time	t_{DF}	-	-	300	ns

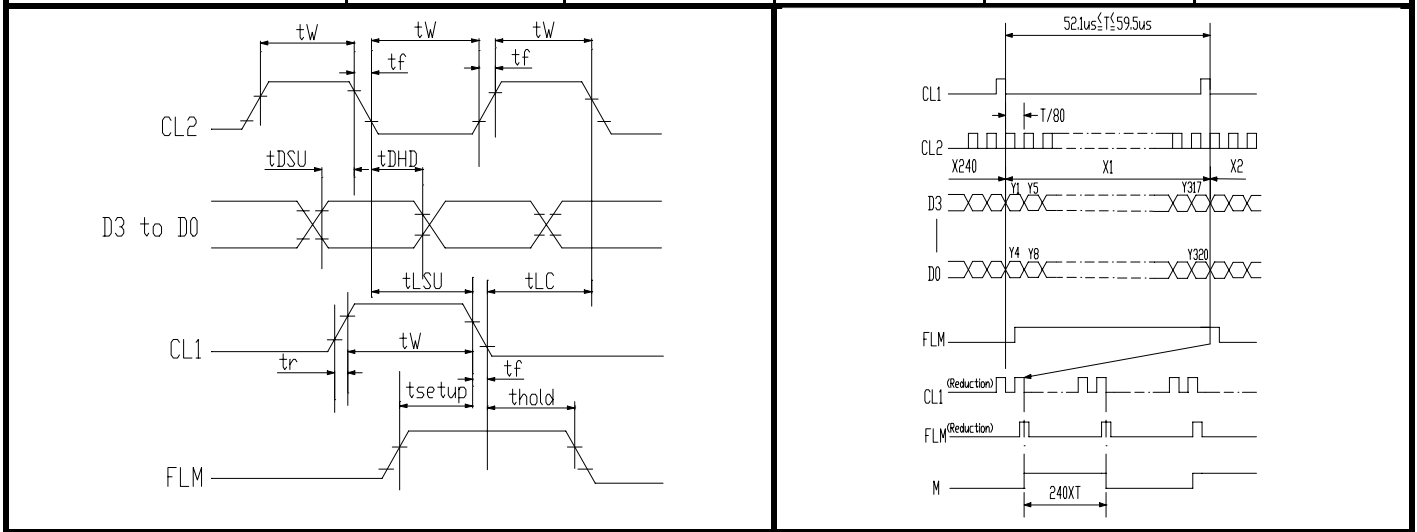

■ BLOCK DIAGRAM

